

**Specification**

**For**

**LCD Module**

**LH19264A-1**

# LH-19264A-1 Dot Matrix LCD Module (Graphic Type)

## ■FEATURES

- Module: graphic LCD arranged as 192 x 64 dots with LED Back-light\*(Yellow/Green)
- Glass Type: STN
- Viewing Direction : 6 'clock (bottom view)
- Display color: Green
- Background color: Yellow
- Polarizer mode: Positive, Reflective/Transflective
- Driving Method: 1/64Duty Cycle, 1/9 Bias
- Glass to PCB: ZEBRA CONNECTOR
- Dot Size : 0.36x 0.36 mm
- Dot Pitch : 0.41 x 0.41 mm

## ■ABSOLUTE MAXIMUM

Item	Symbol	Standard value	Unit
Power Supply Voltage	Vdd	-0.3 ~ +7.0	V
Power supply for LCD Drive	Vlcd	Vdd-19.0 ~ Vdd+0.3	V
Input Voltage	Vin	-0.3 ~ Vdd+0.3	V
Operating Temperature	Top	0 ~ +50	°C
Storage Temperature	Tstg	-10 ~ +60	°C

## ■MECHANICAL PARAMETERS

Item	Description	Unit
PCB Dimension	100.0 x 60.0 x 1.6	mm
LCD Dimension	92.0 x 43.0 x 2.6	mm
View Dimension	84.0 x31.0	mm
Outline Dimension	100 x 60.0 x8.0/13.0*	mm

## ■PIN ASSIGNMENT

Pin NO.	Symbol	Level	Function
1--8	DB7~DB0	--	Data bus
9	E	H/L	Enable Signal
10	R/W	H/L	H: Read Signal, L: Write Signal
11	D/I	H/L	H: Display Data, L: Display Instruction
12	V0	--	For LCD drive voltage(variable)
13	VDD	+5V	Power supply
14	VSS	0V	Power Ground
15	CSB	H/L	Select chip
16	CSA	H/L	Select chip
17	VEE	--	Negative voltage(-10V)to LCD
18	/RES	H/L	Reset Signal
19	LED(+)	--	Power (+)for LED Backlight
20	LED(-)	--	Power (-)for LED Backlight

## ■ELECTRICAL CHARACTERISTICS

### DC Characteristics(Ta=25°C;Vdd=5.0V±10%)


PARAMETER		SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
Operating Voltage(1)		VDD		4.5	5.0	5.5	V
Input Voltage	High	Vih	E,R/W,RS,DB0~DB7 Terminals	2.0	--	VDD	V
	Low	Vil		0	--	0.8	
Output Voltage	High	Voh	DB0~DB7, Terminal	2.4	--	--	V
	Low	Vol		--	--	0.4	
Operating Current		Idd	During Display	--	--	2750	uA

### AC characteristics (Vdd=5V±10%,Vss=0V Ta=25°C)

Characteristic	Symbol	Min.	Max.	Unit
E Cycle	Tcyc	1000	--	ns
E High Level Width	Pweh	450	--	
E Low Level Width	Pwel	450	--	
E Rise Time	Tr	--	25	
E Fall Time	Tf	--	25	
Address Set-Up Time	Tas	140	--	
Address Hold Time	Tah	10	--	

Data Set-Up Time	Tdsw	200	--
Data Delay Time	Tddr	--	320
Data Hold Time(Write)	Tdhw	10	--
Data Hold Time(Read)	Tdhr	20	--

### Writing timing

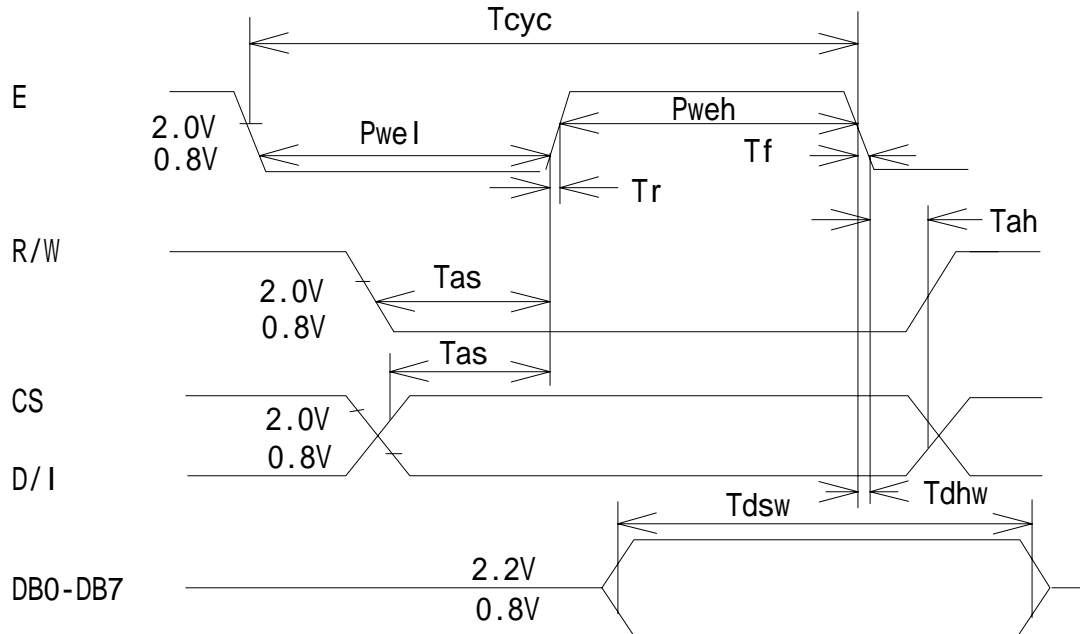

### Reading Timing

